
 $\Delta L_w = 32 \text{ dB}$

Upcycled polyurethane foam and cellular rubber for rolling noise isolation of floating slabs and screeds.

- li. Mat dimension: 1.25m x 5m x 15/7mm
- li. Pallet information: 11 rolls/pallet - pallet: 1200x800x1400mm - 400 kg

MECHANICAL PROPERTIES

MAX. TOTAL LOAD 0.1 MPa	MAX. OCCASIONAL LOAD 1 MPa	DENSITY ⁽¹⁾ 400 kg/m ³	SURFACE WEIGHT ⁽¹⁾ 4.4 kg/m ²
TENSILE STRENGTH ⁽²⁾ > 0.25 MPa	ELONGATION AT BREAK ⁽²⁾ > 50 %	CREEP RATE ⁽³⁾ 0.76 % H/dec	C _{DYN} ⁽⁴⁾ 9 MN/m ³



⁽¹⁾ISO 845 - ⁽²⁾ISO 37 - ⁽³⁾ISO 8013, at 0.02 MPa - ⁽⁴⁾EN 29052-1

THERMAL PROPERTIES

TEMPERATURE RANGE -30°C / 80°C	REACTION TO FIRE Class E ⁽¹⁾ / Class B2 ⁽²⁾	THERMAL CONDUCTIVITY 0.10 W/m°C ⁽³⁾	THERMAL RESISTANCE 0.150 m ² °C/W ⁽³⁾
-----------------------------------	--	---	--

⁽¹⁾EN 13501-1 - ⁽²⁾DIN 4102 - ⁽³⁾EN 12667

ACOUSTICAL RESULTS

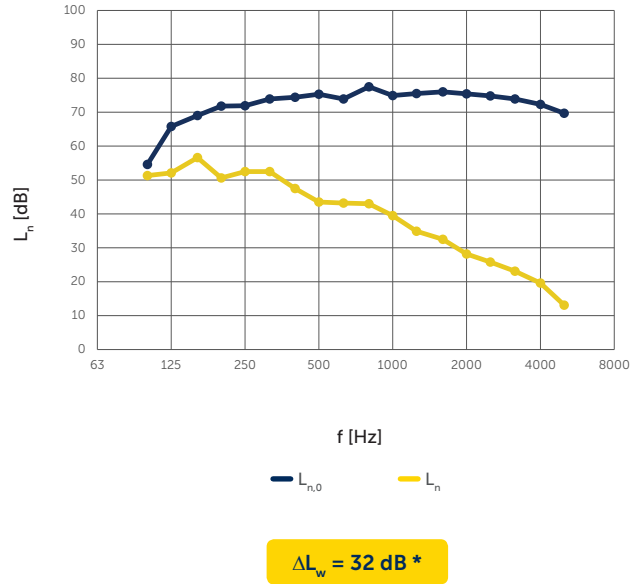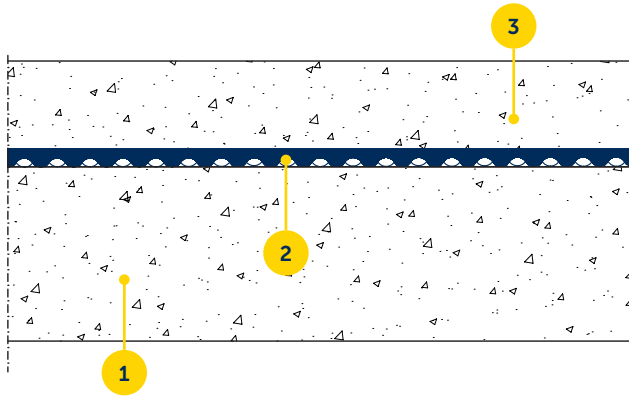

Test setup + test values

1. Standard reinforced concrete floor (140 mm)
2. CDM-MTX-15/7
3. Floating floor: reinforced concrete slab (70 mm)

* Laboratory report available upon request

PHYSICAL & MECHANICAL PROPERTIES

